



Vanity Bar
Barre pour meuble-lavabo (p4-p6)
Barra para tocador (p7-p9)

MODEL/ MODÈLE/ MODELO # FV05-009

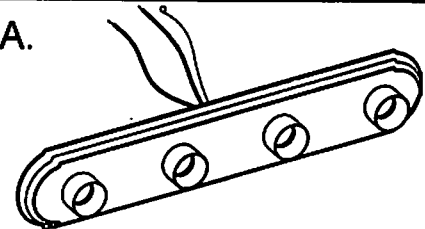


Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 1-800-643-0067, 8 a.m.-6 p.m., EST Monday-Thursday, 8 a.m.-5 p.m., EST Friday.

PACKAGE CONTENTS

Part	Description	Quantity
A.	Fixture unit	1
B.	Machine screws	2
C.	Wire nuts	3
D.	Plastic wall anchors	2
E.	Outlet box screws	2

A.



Fixture unit


B.



C.



D.



E.



⚠ WARNINGS AND CAUTIONS

- TURN OFF ELECTRICITY at main fuse box (or circuit breaker box) before beginning installation by switching circuit breaker off or removing fuse.
- CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- If in doubt about electrical installation, consult a licensed electrician.

PREPARATION


Before beginning assembly and installation of product, make sure all parts are present. Compare parts with package contents list and diagram above. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.


Estimated Assembly Time: 15 minutes.


Tools Required for Assembly: Phillips screwdriver and electrical tape. (not included)


Helpful Tools: Wire cutter (not included).


ASSEMBLY AND INSTALLATION INSTRUCTIONS


- 


1 Shut off main power at the circuit breaker or fuse panel before removing old fixture.
- 


2 Remove old ceiling fixture and disconnect wiring.
- 


3 Remove the socket covers from the sockets. Then separate and remove the mounting bracket from the front plate of the vanity.
- 

4 Attach the mounting bracket to the outlet box using the two outlet box screws provided. The mounting bracket is supplied with keyhole slots for additional attachment to the mounting surface. It will be necessary to mark the location of the keyhole slots on the mounting surface, making sure that the fixture will be level. The narrow end of the keyhole slot should face up. Attach with machine screws for mounting surface.
- 

5 Strip 3/4 in. of insulation from wire ends. Twist stripped ends together with pliers black to black (power), white to white (neutral). Connect the bare copper grounding wire from the fixture, to the grounding conductor of the supply circuit.
- 

6 Attach wire nuts. Tape wire nuts and wires together.
- 

7 Place the vanity against the mounting surface. Secure it with the decorative nuts provided.
- 

8 Push the socket covers onto the sockets.
- 

9 Install light bulbs. Use only bulbs of the specified type and maximum rated wattage or less.

CARE AND MAINTENANCE

- Clean with soft, dry cloth. Do not use abrasives.
- Fixture uses 4 x 60 watt type Medium base bulbs. Shut off main power supply before replacing bulbs.

TROUBLESHOOTING

Problem	Possible Cause	Corrective Action
Bulb won't light.	1. Bulb is burnt out. 2. Power is off. 3. Faulty wire connection. 4. Faulty wall on/off switch.	1. Replace light bulbs. 2. Check power supply. 3. Check wiring. 4. Test or replace wall on/off switch.



WARRANTY

The manufacturer warrants all of its lighting fixtures against defects in materials and workmanship for one (1) year from the date of purchase. If within this period the product is found to be defective in material or workmanship, the product must be returned, with a copy of the original sales receipt as proof of purchase in the original carton, to the place of purchase. The manufacturer will, at its option, repair, replace or refund the original purchase price to the consumer. This warranty does not cover fixtures becoming defective due to misuse, accidental damage, improper handling and/or installation and specifically excludes liability for direct, incidental or consequential damages. As some states do not allow exclusions or limitations on an implied warranty, the above exclusions and limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights that vary from state to state. For warranty questions, call our customer service department at 1-800-643-0067, 8 a.m.-6 p.m., EST Monday-Thursday, 8 a.m.-5 p.m., EST Friday.

REPLACEMENT PARTS LIST

For replacement parts, call our customer service department at 1-800-643-0067, 8 a.m.-6 p.m., EST Monday-Thursday, 8 a.m.-5 p.m., EST Friday.

Part	Factory part No.	Description
A	ED-120	Wire nuts
B	FA-002	Green screw
C	FA-010	Machine screw
D	LA-023	Plastic wall anchor
E	FA-003	Outlet box screw



Printed in China